



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> C08G 18/48, 18/10, C08K 5/00, 5/12, 5/51	<b>A1</b>	<b>(11) International Publication Number:</b> WO 00/35983 <b>(43) International Publication Date:</b> 22 June 2000 (22.06.00)
<b>(21) International Application Number:</b> PCT/EP99/10040 <b>(22) International Filing Date:</b> 17 December 1999 (17.12.99)  <b>(30) Priority Data:</b> 60/112,656 17 December 1998 (17.12.98) US  <b>(71) Applicant (for all designated States except US):</b> CIBA SPECIALTY CHEMICALS HOLDING INC. [CH/CH], Klybeckstrasse 141, CH-4057 Basel (CH).  <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> ARNOUX, Didier [FR/FR]; Hameau du Cazal, F-11230 Chalabre (FR). JONES, Crispin, Frank, Maxwell [GB/GB]; 50 Finchams Close, Linton, Cambridge CB1 6NE (GB). ROSENBERG, Ronald, Owen [US/US]; 781 Quarter Mile Road, Orange, CT 06477 (US).  <b>(74) Common Representative:</b> CIBA SPECIALTY CHEMICALS HOLDING INC.; Patent Department, Klybeckstrasse 141, CH-4002 Basel (CH).		<b>(81) Designated States:</b> AU, CA, JP, KR, US, ZA, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> THERMOSETTING POLY URETHANE/UREA-FORMING COMPOSITIONS  <b>(57) Abstract</b> <p>The present invention relates to poly urethane/urea-forming casting composition that can be cast and cured at temperatures between 15 and 35 °C using a reaction mixture of (a) an isocyanate component or an isocyanate functional prepolymer having at least two isocyanate groups per molecule that contains or has been reacted with polytetramethylene glycol; (b) an aromatic amine curative; and (c) a phosphate ester or phthalate ester having a vapor pressure of less than 100 mPa at 25 °C. The present invention further relates to a cast polyurethane and a process for curing a poly urethane/urea-forming composition.</p>		

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## THERMOSETTING POLY URETHANE/UREA-FORMING COMPOSITIONS

This invention relates to casting polyurethane and/or poly urethane/urea-forming products capable of room temperature curing. More particularly, the invention is drawn to liquid compositions containing isocyanate-functional prepolymers, an aromatic amine curative therefore and a non-volatile phosphate or phthalate plasticizer. The selected poly urethane/urea-forming compositions produce, after room-temperature cure, non-sweating, non-distorting castings or boards with superior elasticity, toughness, tear strength and abrasion resistance.

### BACKGROUND OF THE INVENTION

Aromatic polyisocyanates are well known and are widely used in the preparation of polyurethane and poly urethane/urea elastomers. These aromatic diisocyanates generally include compositions such as 2,4-toluene diisocyanate, 2,6-toluene diisocyanate, 4,4'-methylene bis (phenylisocyanate) and the like. In the preparation of polyurethane and polyurethane/urea elastomers, the aromatic diisocyanates are reacted with a long chain (high molecular weight) polyol to produce a prepolymer containing free isocyanate groups which then may be chain extended with a short chain (low molecular weight) polyol or aromatic diamine to form a polyurethane or polyurethane/urea elastomer. Long chain, high molecular weight polyols, e.g. those having a molecular weight of above 250, are generally utilized to form the prepolymer and the chain extender is generally a short chain polyol, e.g., C<sub>2</sub>-C<sub>10</sub> polyol, or an aromatic diamine. The long chain, high molecular weight polyol provides flexibility and elastomeric properties to the resin, while the short chain polyol or aromatic diamine provides chain extension or cross-links and adds toughness and rigidity to the resulting elastomeric polymer.

A major problem with mononuclear aromatic diisocyanates, such as, toluene diisocyanate, relates to the perceived health risks and their volatility. It is known that residual toluene diisocyanate (free toluene diisocyanate) in a prepolymer mixture can be reduced by lowering the isocyanate/hydroxyl ratio of the prepolymer mixture. This modification, however, has a detrimental effect on processing when the prepolymer is chain extended (or cured), namely, the hardness build up rate decreases very significantly, which leads to an

extended demolding time. The prepolymer viscosity also builds up to levels which prevent processability at ambient temperatures.

Alternatively, it is also known that residual toluene diisocyanate may be physically removed from a prepolymer by vacuum distillation or other methods.

It is also known that by incorporating 2,4 toluene diisocyanate dimer into a prepolymer mix, a low NCO/OH ratio can be used to obtain the desired low residual free toluene diisocyanate content while maintaining the desired hardness build up rate. Such a composition is described in U.S. Pat. No. 5,077,371, which is incorporated herein by reference. The prepolymer's viscosity is measured at 100°C and cured at temperatures in excess of 100°C using 4,4'-methylene-bis(3-chloro)aniline. No phosphate ester plasticizers or room temperature curing are described or contemplated by the teachings in the '371 Patent. There is a need for a poly urethane/urea forming composition having a low free toluene diisocyanate content that is capable of being cast and cured at room temperatures.

Plasticizers are commonly used for polyurethane foaming compositions to modify the foam properties or ease processing as described in U.S. Pat. No. 5,817,860. Examples of plasticizers set forth therein are dioctyl phthalate, diisooctyl phthalate, dimethyl phthalate, dibutyl phthalate, tributyl phosphate, triphenyl phosphate, cresyl diphenyl phosphate, halogenated biphenyls and aromatic oils.

U.S. Pat. No. 5,688,892 describes a waterproofing formulation based upon a cold setting polyurethane formulation using a selected aromatic diamine curative and plasticizers and a toluene diisocyanate reacted with a polyoxypropylene or polyoxyethylene polyol. The plasticizer used therein is dioctyl phthalate.

Published European patent application 829,497 describes a polyurethane casting composition based on an isocyanate or isocyanate-function prepolymer, selected aromatic amine curative with a relatively low polarity and hydrocarbon oils as a plasticizer.

Many conventional plasticizers, however, are either too volatile, which leads to dimensional instability, or become physically incompatible after cure, or have insufficient viscosity reducing effect. The present invention overcomes these obstacles to produce a desired


room temperature curable poly urethane/urea-forming product having a low free toluene diisocyanate content.

### SUMMARY OF THE INVENTION


The present invention is, in one embodiment, drawn to a poly urethane/urea-forming casting composition that can be cast and cured at temperatures between 15 and 35°C using a reaction mixture of (a) an isocyanate component or an isocyanate functional prepolymer having at least two isocyanate groups per molecule that contains or has been reacted with polytetramethylene glycol, (b) an aromatic amine curative, and (c) a phosphate ester or phthalate ester having a vapor pressure of less than 100 mPa at 25°C. Component (a) is preferably a low free toluene diisocyanate prepolymer blend. Component (a) more preferably is a prepolymer blend that is a reaction mixture of an organic diisocyanate and polytetramethylene glycol. The casting composition can further include a polyether- and/or polyester polyol having a number average molecular weight of at least 250.

The aromatic amine curative is preferably selected from the group consisting of diethyl toluene diamine, tertiary butyl toluene diamine, dimethylthiotoluene diamine, , and 1,2-bis(2-aminophenylthio)ethane.


The phosphate ester or phthalate ester is preferably represented by formulae (IA), (IB), (IIA), (IIB) or (III):

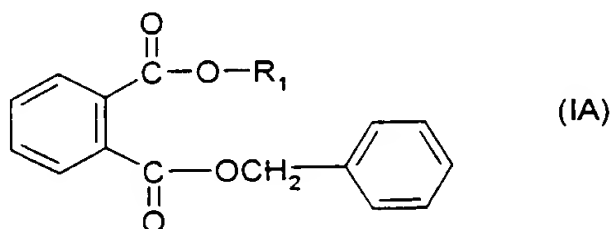


wherein  $R_1$  is unsubstituted or alkyl-substituted  $C_3$ - $C_{12}$ alkyl,

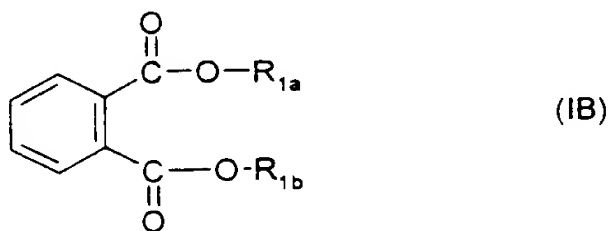


wherein  $R_{1a}$  and  $R_{1b}$ , independently of one another are unsubstituted or alkyl-substituted  $C_5$ - $C_{12}$ alkyl; or phosphate esters according to formulae (IIA) and (IIB)

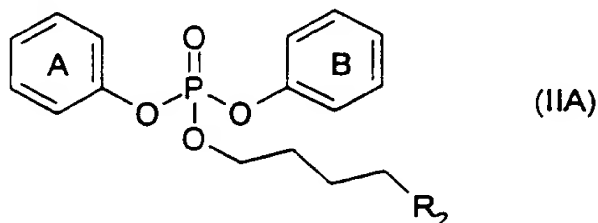

wherein  $R_2$  is hydrogen or unsubstituted or alkyl-substituted  $C_2$ - $C_6$ alkyl, and aromatic rings A and B independently of one another can have one or more alkyl substitutions;

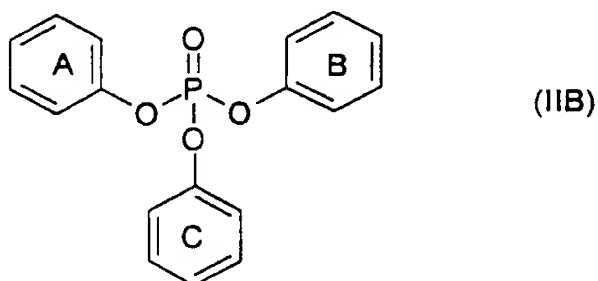

wherein aromatic rings A, B and C independently of one another can have one or more alkyl substitutions, or formula (III)

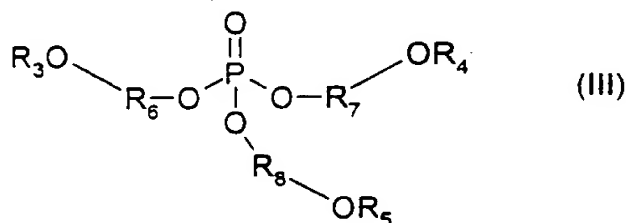


wherein  $R_3$ ,  $R_4$ ,  $R_5$ , independently from one another, are unsubstituted or alkyl substituted  $C_1$ - $C_5$  alkyl and  $R_6$ ,  $R_7$  and  $R_8$  are independently of one another are unsubstituted or alkyl-substituted  $C_1$ - $C_5$ alkylene. More preferably, component (c) is tributoxyethyl phosphate or isodecyl diphenyl phosphate.


The present invention, in a further embodiment, is drawn to a cast polyurethane obtainable by a process comprising reacting (a) an isocyanate component or an isocyanate functional prepolymer having at least two isocyanate groups per molecule that contains or has been reacted with polytetramethylene glycol, (b) an aromatic amine curative, and (c) a phosphate ester or phthalate ester having a vapor pressure of less than 100 mPa at 25°C. Component (a) can be a prepolymer blend resulting from a reaction mixture of an organic diisocyanate

and polytetramethylene glycol. The aromatic amine curative used to obtain cast polyurethane is selected from the group consisting of diethyl toluene diamine, tertiary butyl toluene diamine, dimethylthiotoluene diamine, and 1,2-bis(2-aminophenylthio)ethane. The reactants for obtaining the desired cast polyurethane can further include a polyether- and/or polyester polyol having a number average molecular weight of at least 250.


The phosphate ester or phthalate ester used for this process can preferably be represented by formulae (IA), (IB), (IIA), (IIB) or (III):

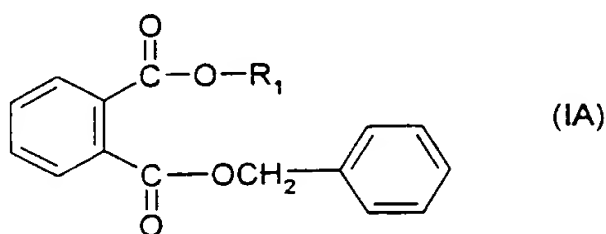


wherein  $R_1$  is unsubstituted or alkyl-substituted  $C_3$ - $C_{12}$ alkyl,

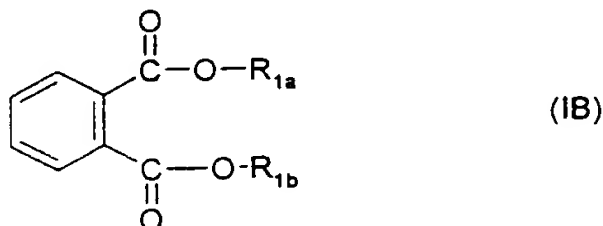


wherein  $R_{1a}$  and  $R_{1b}$ , independently of one another are unsubstituted or alkyl-substituted  $C_5$ - $C_{12}$ alkyl, or phosphate esters according to formulae (IIA) and (IIB)

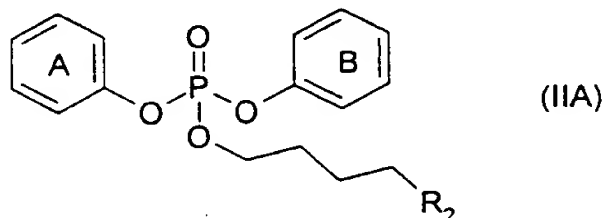

wherein  $R_2$  is hydrogen or unsubstituted or alkyl-substituted  $C_2$ - $C_6$ alkyl, and aromatic rings A and B independently of one another can have one or more alkyl substitutions;

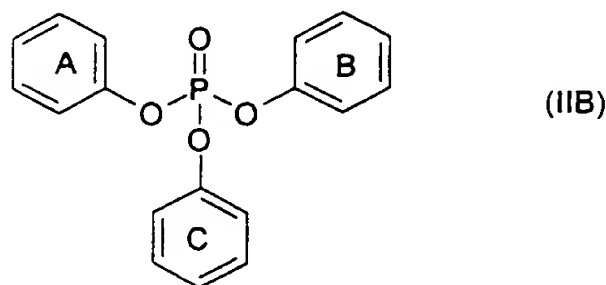

wherein aromatic rings A, B and C independently of one another can have one or more alkyl substitutions, or formula (III)

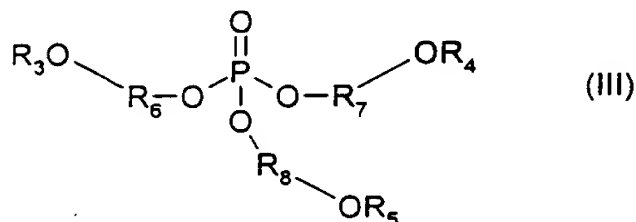

wherein  $R_3$ ,  $R_4$ ,  $R_5$ , independently from one another, are unsubstituted or alkyl substituted  $C_1$ - $C_5$  alkyl and  $R_6$ ,  $R_7$  and  $R_8$  are independently of one another are unsubstituted or alkyl-substituted  $C_1$ - $C_5$ alkylene. More preferably, component (c) is tributoxyethyl phosphate or isodecyl diphenyl phosphate.

The present invention is drawn to a still further embodiment of a process for curing a poly urethane/urea-forming composition comprising contacting said poly urethane/urea-forming composition at a temperature between 15 and 35°C with (a) an aromatic amine curative having at least two primary amine groups, and (b) a plasticizer having a vapor pressure of less than 100 mPa at 25°C with said poly urethane/urea-forming composition.

#### DETAILED DESCRIPTION OF THE INVENTION

The isocyanate used in this invention is an isocyanate having an average functionality of two or more isocyanate groups per molecule. Examples of suitable diisocyanates are 2,4-toluene diisocyanate, 4,4-diphenylmethane diisocyanate, mixtures of diphenylmethane diisocyanate, paraphenyldiisocyanate, isophoronediiisocyanate, 4,4'-methylene-bis(cyclohexylisocyanate), naphthalene diisocyanate and hexamethylene diisocyanate and chain extended prepolymer blends. An alkylene diamine or diol can be reacted with an excess of the isocyanate component to produce such a chain extended prepolymer blends.



In a preferred embodiment, a low-free toluene diisocyanate prepolymer is made by reacting toluene diisocyanate with high molecular weight aliphatic polyester or polyether polyols to produce a prepolymer having a toluene diisocyanate content below 0.4% by weight, optionally by removal of excess toluene diisocyanate. Optionally, a mixture of a low molecular weight polyol (number average molecular weight less than 250) and a high molecular weight polyol (number average molecular weight of at least 250) can also be reacted with the toluene diisocyanate.

Representative toluene diisocyanates include the two main isomers, 2,4- and 2,6-diisocyanate and optionally, a small amount of the ortho isomers, the 2,3- and 3,4-isomers. Commercially, toluene diisocyanate is found as a 65:35, 80:20 or 99:1 isomer mix of the 2,4- and 2,6-isomer by weight and optionally from 0-5% by weight of the ortho isomers. An isomer mix is preferred within a range of from about 65-100% of the 2,4-isomer and the balance (0-35%) being essentially the 2,6-isomer. The most preferred range of the 2,6-isomer is 20-35%.

The 2,4-toluene diisocyanate dimer can be added to the selected organic diisocyanate(s) in an amount ranging up to the dimer's solubility limit at about 80°C to form an isocyanate blend. Preferably the dimer is present at up to about 6.0% by weight of the isocyanate blend, that is, the mixture of the toluene diisocyanate dimer and the selected organic diisocyanate(s). More preferably up to about 4.0% by weight of dimer may be present in the isocyanate blend.

High molecular weight polyols, particularly polyether polyols or polyester polyols having a number average molecular weight of at least 250, can be used to prepare the prepolymer of the instant invention. Polyols having a number average molecular weight of about 650 to 3000 are preferred, with polyols having number average molecular weights of 1000 being the most preferred. The number average molecular weight of the high molecular weight polyol can be as high as 10,000 or as low as 250. Preferred polyether polyols are polyalkyleneether polyols represented by the general formula  $\text{HO}(\text{RO})_n\text{H}$ , wherein R is an alkylene radical and n is an integer large enough that the polyether polyol has a number average molecular weight of at least 250. These polyalkyleneether polyols are well-known components of polyurethane products and can be prepared by the polymerization of cyclic

ethers such as alkylene oxides and glycols, dihydroxyethers, and the like by known methods. A particularly preferred high molecular weight polyol is polytetramethylene glycol.

Polyester polyols are prepared by reaction of dibasic acids (usually adipic acid but other components such as sebacic or phthalic acid may be present) with diols such as ethylene glycol, 1,2-propylene glycol, 1,4-butylen glycol and diethylene glycol, etc., where linear polymer segments are required, or include units of higher functionality such as glycerol, trimethylol propane, pentaerythritol, sorbitol, etc., if chain branching or ultimate cross-linking is sought. Some polyester polyols also employ caprolactone and dimerized unsaturated fatty acids in their manufacture. Another type of polyester which is of interest is that obtained by the addition polymerization of  $\epsilon$ -caprolactone in the presence of an initiator. Other polyols that can be used are those that have at least two hydroxyl groups and whose basic backbone is obtained by polymerization or copolymerization of such monomers as butadiene and isoprene monomers.

The initial polyol portion for making a prepolymer blend of the instant invention can be combination of high molecular weight polyol, as previously described, and a low molecular weight polyol. An aliphatic glycol is the preferred low molecular weight polyol. Suitable aliphatic polyols are ethylene glycol, diethylene glycol, dipropylene glycol, neopentyl glycol, 1,3-butanediol, 1,4-butanediol, and the like. The most preferred low molecular weight polyol is 1,4-butanediol. In general, the weight of the low molecular weight polyol should be no more than 20% of the combination of high molecular weight polyol and low molecular weight polyol. The preferred range is 0 to 15% of the combination; more preferred is 0-8%.

The prepolymers are preferably prepared by loading toluene diisocyanate, then adding the polyol or initial polyol blend, maintaining the temperature at from room temperature to temperatures as high as 150°C for sufficient time to react all of the available hydroxyl groups, then removing unreacted toluene diisocyanate by vacuum distillation or other physical means. Preferred reaction temperatures are 50°C to 100°C; more preferred temperatures are 50°C to 85°C. The product is poured into containers under a nitrogen flush and stored at room temperature. A particularly preferred prepolymer is commercially available from Uniroyal Corporation under the tradename Adiprene® LF 750D.


The stoichiometric ratio of isocyanato groups to hydroxyl groups in the reactants should preferably be from 2/1 to 30/1 although somewhat lower and higher ratios are permissible. When the ratio is much lower, the molecular weight of the isocyanato terminated polyurethane becomes so large (due to formation of oligomers with more than one polyol moiety) that the viscosity of the mass makes mixing of chain extenders into the prepolymer relatively more difficult. At the other extreme, an excess approaching the 30/1 ratio will result in high levels of free diisocyanate in the mixture (with higher removal costs). Therefore, the preferred range is 2.5/1 to 10/1.

The curative used with the prepolymer described above is an organic aromatic polyamine having two or more amine groups. The organic aromatic polyamine can be combined with polyether- and/or polyester-polyols described above to modify the final product or cure characteristics. Of course, known catalysts can be used in conjunction with the curative if necessary.


Examples of aromatic polyamine materials are: diethyl toluene diamine (DETDA), tertiary butyl toluene diamine (TBTDA), dimethylthiotoluene diamine (Ethacure™ 300) from Albermarle Corporation, trimethylene glycol di-p-aminobenzoate (Vibracure™ A157 from Uniroyal Chemical Company or Versalink™ 740 from AirProducts and Chemicals Inc.), and 1,2-bis(2-aminophenylthio)ethane (Cyanacure from American Cyanamid Company). The most preferred aromatic polyamine is dimethylthiotoluene diamine.

The castable composition combines the isocyanate component and/or prepolymer blend and curative described above with a plasticizing agent having a vapor pressure at 25°C of less than 100 mPa and/or an evaporation rate of <40% after 24 hours at 87°C according to ASTM 1203-67. The preferred plasticizing agents are phosphate or phthalate esters having a vapor pressure at 25°C of less than 100 mPa.

Particularly preferred plasticizing agents are alkyl benzyl phthalates monomers according to formulae (IA) and (IB)

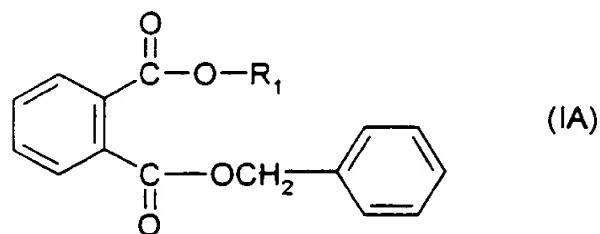


wherein  $R_1$  is unsubstituted or alkyl-substituted  $C_3$ - $C_{12}$ alkyl,

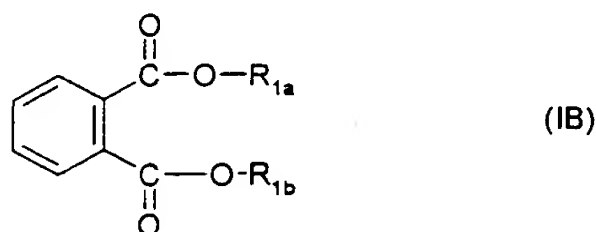


wherein  $R_{1a}$  and  $R_{1b}$ , independently of one another are unsubstituted or alkyl-substituted  $C_5$ - $C_{12}$ alkyl, preferably  $C_9$ - $C_{12}$ alkyl;


or phosphate esters according to formulae (IIA) and (IIB)

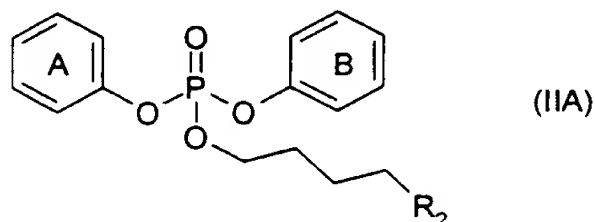

wherein  $R_2$  is hydrogen or unsubstituted or alkyl-substituted  $C_2$ - $C_6$ alkyl, and aromatic rings A and B independently of one another can have one or more alkyl substitutions;

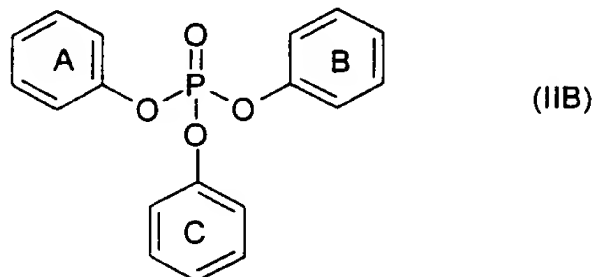

wherein aromatic rings A, B and C independently of one another can have one or more alkyl substitutions,  
or formula (III)

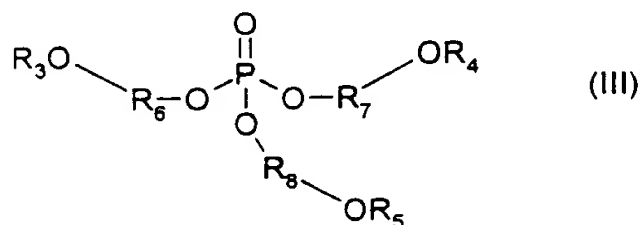

wherein  $\text{R}_3$ ,  $\text{R}_4$ ,  $\text{R}_5$ , independently from one another, are unsubstituted or alkyl substituted  $\text{C}_1$ - $\text{C}_5$  alkyl and  $\text{R}_6$ ,  $\text{R}_7$  and  $\text{R}_8$  are independently of one another are unsubstituted or alkyl-substituted  $\text{C}_1$ - $\text{C}_5$ alkylene.

Representative compounds falling with formula (IA) are propyl benzyl phthalate, butyl benzyl phthalate (Santicizer 160, Solutia), pentyl benzyl phthalate, hexyl benzyl phthalate, heptyl benzyl phthalate (Santicizer 261, Solutia), octyl benzyl phthalate, nonyl benzyl phthalate, decyl benzyl phthalate and  $\text{C}_1$ - $\text{C}_3$ alkyl-substituted compounds thereof. Another commercially available alkyl benzyl phthalate is Santicizer 278, Solutia). Representative compounds falling with formula (IB) are dipentyl phthalate, dihexyl phthalate, diheptyl phthalate, dioctyl phthalate, dinonyl phthalate, didecyl phthalate and  $\text{C}_1$ - $\text{C}_3$ alkyl-substituted compounds thereof. Another commercially available alkyl benzyl phthalate is Santicizer 278, Solutia.

Representative compounds falling with formula (IIA) are pentyl diphenyl phosphate, hexyl diphenyl phosphate, heptyl diphenyl phosphate, octyl diphenyl phosphate, nonyl diphenyl phosphate and  $\text{C}_1$ - $\text{C}_3$ alkyl substituted compounds thereof, such as isodecyl diphenyl phosphate (Santicizer 148) and 2-ethylhexyl diphenyl phosphate (Santicizer 141, Solutia) and Santicizer 2148 (Solutia). Representative compounds falling with formula (IIB) are triphenyl phosphate and tricresyl phosphate.

Representative monomers falling with formula (III) are tris(methoxymethyl)phosphate, tris(ethoxymethyl)phosphate, tris(propoxymethyl)phosphate, tris(butoxymethyl)phosphate, tris(pentoxymethyl)phosphate; tris(2-methoxyethyl)phosphate, tris(2-ethoxyethyl)phosphate, tris(2-propoxyethyl)phosphate, tris(2-butoxyethyl)phosphate, tris(2-pentoxyethyl)phosphate; tris(methoxypropyl)phosphate, tris(ethoxypropyl)phosphate, tris(propoxypropyl)phosphate, tris(butoxypropyl)phosphate, tris(pentoxypropyl)phosphate; tris(methoxybutyl)phosphate, tris(ethoxybutyl)phosphate, tris(propoxybutyl)phosphate, tris(butoxybutyl)phosphate, tris(pentoxybutyl)phosphate; tris(methoxypentyl)phosphate, tris(ethoxypentyl)phosphate,

tris(propoxypentyl)phosphate, tris(butoxypentyl)phosphate and tris(pentoxypentyl)phosphate. Isodecyl diphenyl phosphate is the most preferred.

The casting composition of the present invention is a mixture of the isocyanate component and/or isocyanate functional prepolymer blend, an aromatic amine curative, selected plasticizer(s) and optionally additional polyether- and/or polyester-polyol, and/or diisocyanate dimer. The mixture preferably contains about 40-80% by weight of an isocyanate functional prepolymer with an isocyanate content between 4 and 15% formed by the reaction of toluene diisocyanate with at least one polyol; 7-20% by weight of an aromatic polyamine; 6-30% by weight of a phosphate or phthalate ester plasticizer having a vapor pressure at 25°C of less than 100 mPa, and optionally, 0-20% by weight of uretdione diisocyanate (poly-HDI). In a more preferred embodiments, the isocyanate functional prepolymer blend has a free toluene diisocyanate content below 0.4%, most preferably below 0.1%.

A wide variety of fillers, dyes, and pigments can be used in the formulations described above. Examples of suitable fillers are calcium carbonate, clays, talcs, zinc oxide, titanium dioxide, and silica. The amount of filler usually is in the range of 0 to 800 parts per hundred by weight, depending on the application for which the formulation is intended.

Stabilizers known in the art can also be incorporated into the composition. The stabilizers may be for protection during the life of the finished product against, for example, oxygen, ozone, and ultra-violet radiation. Stabilizers can also be incorporated to protect against thermooxidative degradation during processing. Antioxidants and UV inhibitors that would otherwise interfere with the urethane curing process should be avoided. Preferred antioxidants are sterically hindered phenolic compounds. Stabilizers such as organic phosphites are also useful. Preferred UV inhibitors are benzotriazole compounds.

For curing these prepolymers, the number of  $-NH_2$  groups in the aromatic diamine component should be approximately equal to the number of  $-NCO$  groups in the isocyanate component and/or prepolymer blend. A small variation is permissible but in general from about 80 to 110% of the stoichiometric equivalent should be used, preferably about 85 to 100%.

The castable compositions described herein can be prepared by mixing the selected polyol(s) chain extenders with the isocyanate component and/or isocyanate functional preopolymer. The resulting chain extended product can then be used immediately or stored under a nitrogen blanket until such time that a casting is desired. The selected aromatic amine curative can be separately combined with the plasticizer and stored. Once a casting is desired, the chain extended product is combined with the aromatic amine curative and plasticizer and poured into a mould for curing and post-curing, if necessary.

Applications for cast elastomers include, potting and encapsulants, pipe seals, athletic surfaces, binders, drop hammer tools, prototype parts, foundry core boxes, pattern plates, bumping tools, working models for the ceramic industry and other moulded articles resulting from cast mouldings. The present invention, therefore, further relates to moulded articles resulting from the formulations described herein. Preferably, the moulded article is free of any fiber reinforcing materials, such as carbon fibers, and yet exhibits a Shore D hardness in excess of about 45, more preferably in excess of about 50.

The following examples are illustrative of the present invention and are therefore not intended as a limitation on the scope thereof.

#### Example 1

The following components are combined in a closed vessel at ambient pressure and temperature. The components are intimately mixed for a sufficient time to produce a homogenous mixture, at which time the physical properties are determined.

#### Components

ADIPRENE LF750D	76.86g
Isodecyl diphenyl phosphate	23.02g
BYK A530	0.12g (degassing aid)
Dimethylthiotoluene diamine	17.00g

At 25°C viscosity of mixture is 3500 - 4000 mPas

Properties after curing at 25°C for 7days:

Shore D hardness (ISO 868) 50 - 53

Tensile strength (ISO527)	20 - 25 MPa
Elongation at break (ISO527)	150 - 200 %

#### Example 2

The components identified below are combined analogously to the methods described in example 1 to produce a homogenous mixture.

ADIPRENE LF750D	53.80g
DESMODUR N3400	23.06g
Isodecyl diphenyl phosphate	23.06g
BYK A530	0.08g (a degassing aid)
Dimethylthiitoluene diamine	24g

At 25°C viscosity of mixture is 1000 mPas

Properties after curing at 25°C for 7days:

Shore D hardness (ISO 868)	63 - 66
Tensile strength (ISO527)	25 - 30 MPa
Elongation at break (ISO527)	150 - 200 %

#### Example 3

Several plasticizers identified below were used in a mixture of 76.86 grams Adiprene LF750D, 0.1 grams BYK A530 and 17 grams dimethylthiitoluene diamine. The mixtures are then introduced into a mould and cast into either a 400x75x100 mm bar or a 100 mm diameter circle having a 5 to 10 mm thickness. The mixtures are allowed to cure at ambient conditions for 16 hours. The resulting cured bars are demoulded and left on a flat surface. Distortion is shown when the ends of the cured bars curl upwards within three days of demoulding. The results of various plasticizers are shown below:




Plasticizer	Amount (g)	Evaporation rate	Vapor pressure at 25°C (mm Hg)	Vapor pressure at 25°C (mPa)	Distortion of cured specimens
gamma-butyrolactone	15.37		0.3	40000	Yes
Butyl glycol acetate	15.37		0.3	40000	Yes
Dibasic ester	12.3		0.08	11000	Yes
Propylene carbonate	15.37		0.08	11000	Yes
Dibutyl phthalate	23.06	44	0.0063	840	Slight
Ethylhexyl diphenyl phosphate	23.06	7.4	$6 \times 10^{-5}$	8	No
Butyl benzyl phthalate	30.74	7.7	$3 \times 10^{-7}$	$4 \times 10^{-2}$	No
Isodecyl diphenyl phosphate	23.06	2.8	$3 \times 10^{-8}$	$4 \times 10^{-3}$	No
tributoxy ethyl phosphate	23.06	6.2	$10^{-4} - 10^{-6}$	0.13 - 13	No

Preferred embodiments of the present invention relating to novel poly urethane/urea-forming compositions and methods for using the same have been described above. Those skilled in the art having the benefit of the teachings presented in the foregoing will recognize modifications and other embodiments. Therefore, it is understood that the


invention is not limited to the specific embodiments disclosed herein, and that modifications and other embodiments are intended to be within the scope of the appended claims.

Claims:

1. A poly urethane/urea-forming casting composition that can be cast and cured at temperatures between 15 and 35°C comprising a reaction mixture of (a) an isocyanate component or an isocyanate functional prepolymer having at least two isocyanate groups per molecule that contains or has been reacted with polytetramethylene glycol; (b) an aromatic amine curative; and (c) a phosphate ester or phthalate ester having a vapor pressure of less than 100 mPa at 25°C.
2. A casting composition according to claim 1 wherein component (a) is a low free toluene diisocyanate prepolymer blend having a free toluene diisocyanate content below 0.4%.
3. A casting composition according to claim 2 wherein the reaction mixture comprises a prepolymer blend that is a reaction mixture of an organic diisocyanate and polytetramethylene glycol.
4. A casting composition according to claim 1 wherein the aromatic amine curative is selected from the group consisting of diethyl toluene diamine, tertiary butyl toluene diamine, dimethylthiotoluene diamine, , and 1,2-bis(2-aminophenylthio)ethane.
5. A casting composition according to claim 4 wherein the aromatic amine curative is dimethylthiotoluene diamine.
6. A casting composition according to claim 5 further comprising a polyether- and/or polyester polyol having a number average molecular weight of at least 250.
7. A casting composition according to claim 1 wherein the phosphate ester or phthalate ester is represented by formulae (IA), (IB), (IIA), (IIB) or (III):

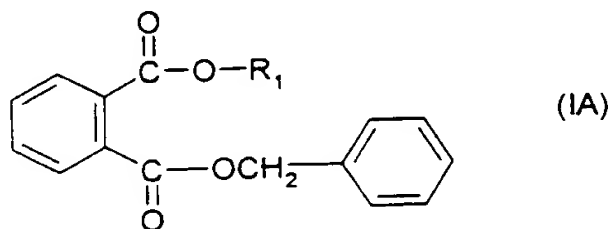


wherein R<sub>1</sub> is unsubstituted or alkyl-substituted C<sub>3</sub>-C<sub>12</sub>alkyl,

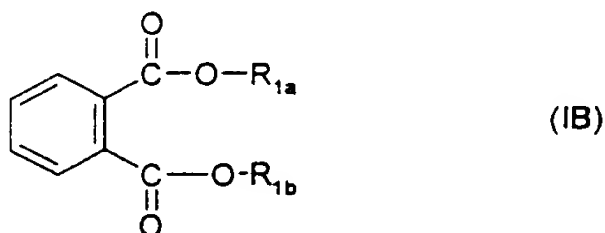


wherein  $R_{1a}$  and  $R_{1b}$ , independently of one another are unsubstituted or alkyl-substituted  $C_5$ - $C_{12}$ alkyl;

or phosphate esters according to formulae (IIA) and (IIB)

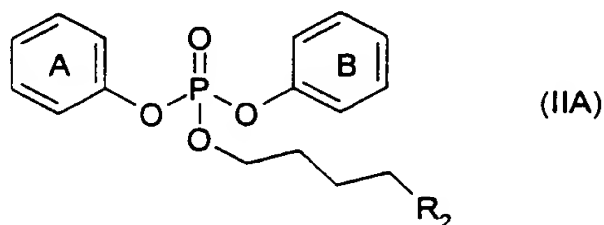


wherein  $R_2$  is hydrogen or unsubstituted or alkyl-substituted  $C_2$ - $C_6$ alkyl, and aromatic rings A and B independently of one another can have one or more alkyl substitutions;

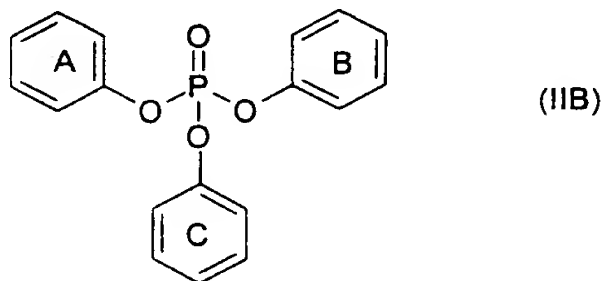


wherein aromatic rings A, B and C independently of one another can have one or more alkyl substitutions,

or formula (III)

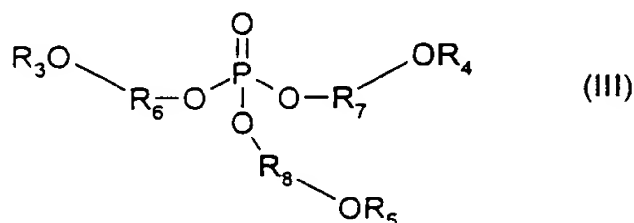


wherein  $R_3$ ,  $R_4$ ,  $R_5$ , independently from one another, are unsubstituted or alkyl substituted  $C_1$ - $C_5$  alkyl and  $R_6$ ,  $R_7$  and  $R_8$  are independently of one another are unsubstituted or alkyl-substituted  $C_1$ - $C_5$ alkylene.

8. A casting composition according to claim 1 wherein component (c) is tributoxyethyl phosphate or isodecyl diphenyl phosphate.
9. A casting composition according to claim 5 wherein component (c) is tributoxyethyl phosphate or isodecyl diphenyl phosphate.
10. A cast polyurethane obtainable by a process comprising reacting (a) an isocyanate component or an isocyanate functional prepolymer having at least two isocyanate groups per molecule that contains or has been reacted with polytetramethylene glycol; (b) an aromatic amine curative; and (c) a phosphate ester or phthalate ester having a vapor pressure of less than 100 mPa at 25°C.
11. A polyurethane casting according to claim 10 wherein component (a) is a low free toluene diisocyanate prepolymer blend having a free toluene diisocyanate content below 0.4%.
12. A polyurethane casting according to claim 11 wherein component (a) is a prepolymer blend resulting from a reaction mixture of an organic diisocyanate and polytetramethylene glycol.
13. A polyurethane casting according to claim 10 wherein the aromatic amine curative is selected from the group consisting of diethyl toluene diamine, tertiary butyl toluene diamine, dimethylthiotoluene diamine, and 1,2-bis(2-aminophenylthio)ethane.
14. A polyurethane casting according to claim 13 wherein the aromatic amine curative is dimethylthiotoluene diamine.
15. A polyurethane casting according to claim 14 wherein the process further comprising combining a polyether- and/or polyester polyol having a number average molecular weight of at least 250 with components (a), (b) and (c).
16. A polyurethane casting according to claim 10 wherein the phosphate ester or phthalate ester is represented by formulae (IA), (IB), (IIA), (IIB) or (III):

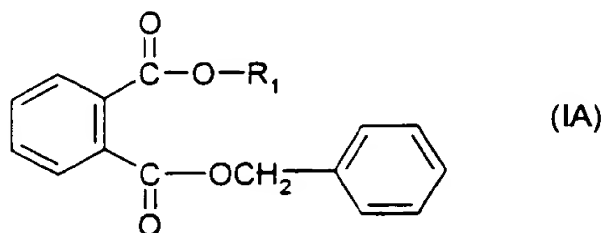


wherein  $R_1$  is unsubstituted or alkyl-substituted  $C_3$ - $C_{12}$ alkyl,

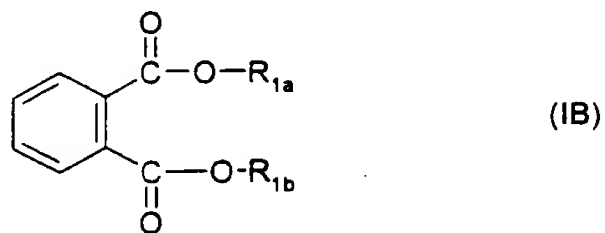


wherein  $R_{1a}$  and  $R_{1b}$ , independently of one another are unsubstituted or alkyl-substituted  $C_5$ - $C_{12}$ alkyl,

or phosphate esters according to formulae (IIA) and (IIB)

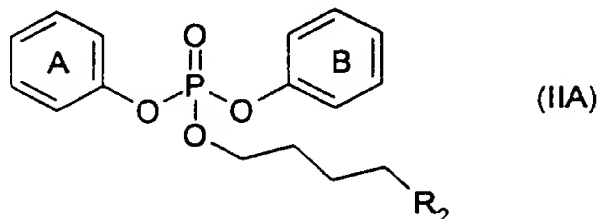


wherein  $R_2$  is hydrogen or unsubstituted or alkyl-substituted  $C_2$ - $C_6$ alkyl, and aromatic rings A and B independently of one another can have one or more alkyl substitutions;

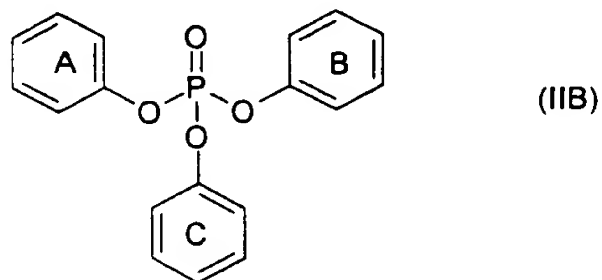

wherein aromatic rings A, B and C independently of one another can have one or more alkyl substitutions,

or formula (III)

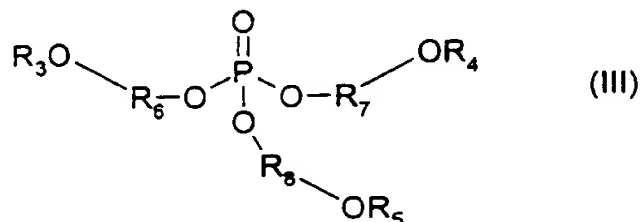

wherein  $\text{R}_3$ ,  $\text{R}_4$ ,  $\text{R}_5$ , independently from one another, are unsubstituted or alkyl substituted  $\text{C}_1$ - $\text{C}_5$  alkyl and  $\text{R}_6$ ,  $\text{R}_7$  and  $\text{R}_8$  are independently of one another are unsubstituted or alkyl-substituted  $\text{C}_1$ - $\text{C}_5$ alkylene.

17. A polyurethane casting according to claim 10 wherein component (c) is tributoxyethyl phosphate or isodecyl diphenyl phosphate.

18. A polyurethane casting according to claim 14 wherein component (c) is tributoxyethyl phosphate or isodecyl diphenyl phosphate.

19. A process for curing a poly urethane/urea-forming composition according to claim 1 comprising contacting said poly urethane/urea-forming composition at a temperature between 15 and 35°C with (a) an aromatic amine curative having at least two primary amine groups; and (b) a plasticizer having a vapor pressure of less than 100 mPa at 25°C with said poly urethane/urea-forming composition.

PCT/EP 99/10040

IPC 7 C08G18/48 C08G18/10 C08K5/00 C08K5/12 C08K5/51

IPC 7 C08G C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE WPI Section Ch, Week 199408 Derwent Publications Ltd., London, GB; Class A25, AN 1994-062111 XP002132421 & JP 06 016767 A (BANDO CHEM IND LTD), 25 January 1994 (1994-01-25) abstract	1,3,4,7, 10,12, 13,16
X	US 3 980 606 A (WERNER BYRON H) 14 September 1976 (1976-09-14) column 1, line 23 -column 2, line 9 examples III,IV	1,3,7, 10,12,16
P,X	FR 2 764 893 A (GANGA ROLAND ALEXANDRE) 24 December 1998 (1998-12-24) example 5	1,3-5, 10,12-14

-/-

**X** Patent family members are listed in annex.

"3" document member of the same patent family

23/03/2000

Neugebauer, U



# INTERNATIONAL SEARCH REPORT

International Application No.  
PCT/EP 99/10040

## C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 376 674 A (MITSUI TOATSU CHEMICALS) 4 July 1990 (1990-07-04)  page 3, line 20 - line 28 page 4, line 22 - page 5, line 27 example 1; table 1	1, 3, 4, 7, 10, 12, 13, 16
A	US 5 688 892 A (ISHII AKIRA ET AL) 18 November 1997 (1997-11-18) cited in the application example 1	1, 4, 7, 19

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/EP 99/10040

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
JP 6016767	A	25-01-1994	JP	2051847 C	10-05-1996
			JP	7072223 B	02-08-1995
US 3980606	A	14-09-1976	NONE		
FR 2764893	A	24-12-1998	AU	8024698 A	04-01-1999
			WO	9858979 A	30-12-1998
EP 0376674	A	04-07-1990	CA	2006725 A	28-06-1990
			CN	1048225 A, B	02-01-1991
			DE	68921866 D	27-04-1995
			DE	68921866 T	27-07-1995
			JP	2258877 A	19-10-1990
			KR	9303016 B	16-04-1993
			US	5059671 A	22-10-1991
US 5688892	A	18-11-1997	JP	8143816 A	04-06-1996
			CN	1127512 A	24-07-1996
			WO	9529198 A	02-11-1995